

ECODIS-DOUBLE

FUEL DISPENSER


Dispense all fuels in intensive use on your private station.

Dispenser's technical specifications

- ❑ DOUBLE dispenser for all fuels, 40 or 80 liters/minute flow-rate on each nozzle
- ❑ Two 380 volts three-phase ex-proof motors : II 2G Ex d IIB
- ❑ Two self-priming vane pumps for all fuels
- ❑ Two air separators
- ❑ Two 4 pistons flow meters of approx. 0,2 % accuracy
- ❑ Two dual-channel sensors Ex dII BT4
- ❑ High-gloss epoxy painted steel body
- ❑ Door closing system by key locks
- ❑ Drip tray at the bottom
- ❑ Two ZVA 19 automatic nozzles with swivel
- ❑ Two EN1360 Ø 19 hose
- ❑ Hydraulic connection by two 1½ " triangular flanges
- ❑ Dimensions : L. 960 / W. 400 / H. 1460 mm
- ❑ Weight (standard version) : approx. 160 kg

Options disponibles

- ❑ Adapters for connection to above-ground tank
- ❑ SSB break-away swivel
- ❑ Flow selector
- ❑ 240 volts electric motors
- ❑ Flexible hose mast
- ❑ Emergency stop button
- ❑ ZVA 25 nozzle
- ❑ Thermal protection
- ❑ Water separator filter
- ❑ Additional output for satellite connection
- ❑ Emergency crank for manual delivery
- ❑ Custom painting
- ❑ Integration of an automaton or calculators
- ❑ Stainless steel body
- ❑ Built-in hose reels
- ❑ Nozzles on front door

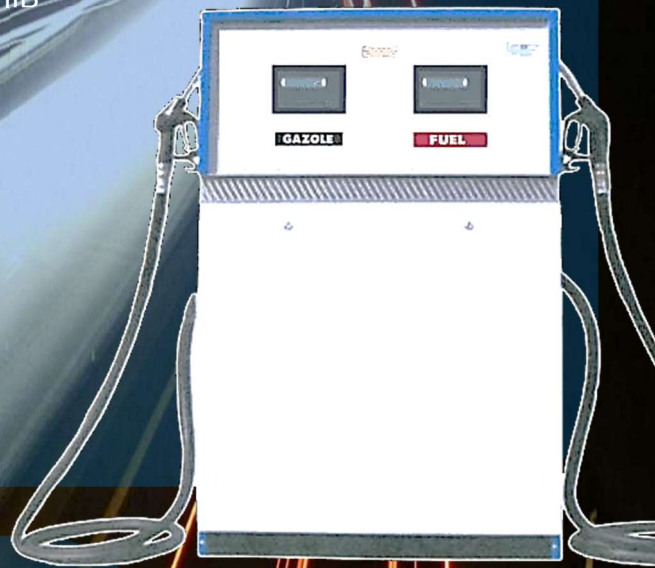

VERSION WITH BUILT-IN HOSE REELS AND NOZZLES ON FRONT DOOR

Reference	Description
ECODIS2	2 products 40 or 80 L/min galvanized steel dispenser
ECODIS2-I	2 products 40 or 80 L/min stainless steel dispenser
D120LM005	Modification for 120L/min flow-rate
PTH005	Motor thermal protection
M240V005	Single phase 240VAC motor
VCD007	Key switch locking system
AU007	Emergency stop button
CA701	LCD electronic calculator

ALX
TECHNOLOGIES